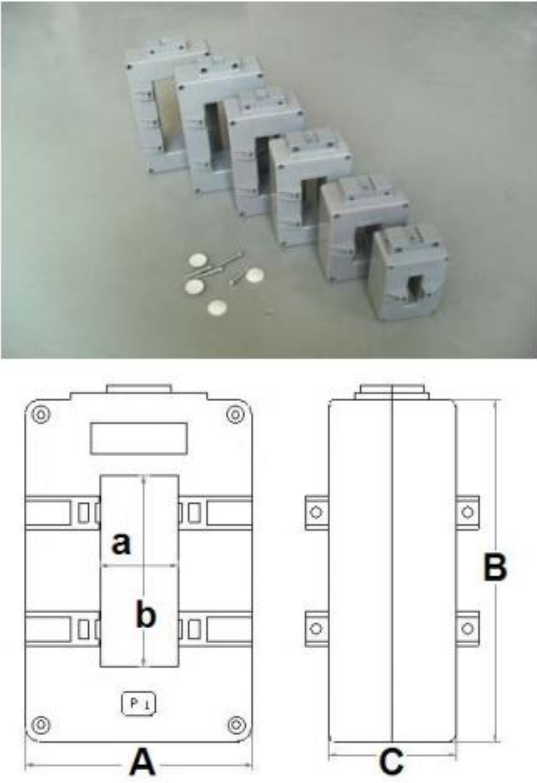


# Low Voltage Current Transformers

## LMKIII Series

Mfg P/N	Input/Output (A)	Burden(VA)/Class			Product Description
		0.2	0.5	1.0	
LMKIII-50	5/5	--	---	2.5(6T)	
	10/5	--	---	2.5(3T)	
	20/5	--	---	2.5(2T)	
	30/5	--	1.5	2.5	
	50/5	--	1.5	2.5	
	75/5	--	2.5	5	
	100/5	--	2.5	5	
	150/5	--	2.5	5	
	250/5	1.5	5	10	
	500/5	5	10	15	
	1000/5	10	20	25	
LMKIII-60	1500/5	15	25	30	
	250/5	1.5	5	10	
	500/5	5	10	15	
	1000/5	10	20	25	
	1500/5	15	25	30	
LMKIII-80	2000/5	25	40	50	
	500/5	5	10	15	
	1000/5	10	20	25	
	1500/5	15	25	30	
	2500/5	30	40	50	
LMKIII-100	3000/5	40	45	50	
	1000/5	10	20	25	
	1500/5	15	25	30	
	2000/5	25	40	50	
	2500/5	30	40	50	
LMKIII-120	3000/5	40	45	50	
	1000/5	15	25	30	
	2000/5	25	40	50	
	2500/5	30	40	50	
	5000/5	40	45	50	
LMKIII-130	3000/5	40	45	50	
	1000/5	15	25	30	
	2000/5	25	40	50	
	2500/5	30	40	50	
	5000/5	40	45	50	

Type	a	b	A	B	C
LMKIII-50	16	52	75	105	55
LMKIII-60	33	62	100	125	56
LMKIII-80	33	83	100	149	56
LMKIII-100	33	103	105	175	56
LMKIII-120	33	123	125	200	56
LMKIII-130	57	132	130	205	54

**NOTE:**

- Rated Primary current :0-5000Aac
- Rated Secondary current: 5A
- Rated load: 2.5, 3.75, 5.0, 10,15, 20,30, 50VA
- Accuracy: 0.2, 0.5, 1.0 Class
- Output Connection:2\*2.5mm<sup>2</sup> Wire 1m or Terminal
- Forbidden to open the second, otherwise, easy to produce high voltage

Xiamen ZT Technology Co., Limited

Skype: zntarjason,

[zntarjason@gmail.com](mailto:zntarjason@gmail.com),

[sales@zntar.com](mailto:sales@zntar.com)

[www.zntar.com](http://www.zntar.com)