

Split Core Current Transformers

SCTK667 Series

SCTK667 series retro-fit (split-core) current transformer has been specially designed to facilitate their installation in new or already existing net works. They may be installed without opening any cable or bus-bar circuit. An internal precision resistor across the secondary winding of the CT provides a low safe voltage output. It can save time and the installation costs.



◆ Features

- Double-screw fastening, safe, easy to install, portable
- Wide inner window, allowing clamping of big cables or bus-bars
- Wide range of sizes to accommodate all the existing installations

◆ Applications

- Current measurement, monitoring and protection for electrical wiring and equipment.
- Current and power measurement for electric motors, lighting, air compressor, heating and ventilation system, air-condition equipment and automation – control system.
- Current, power and energy monitoring device.
- Relay protection device.

◆ Circuit connection diagram

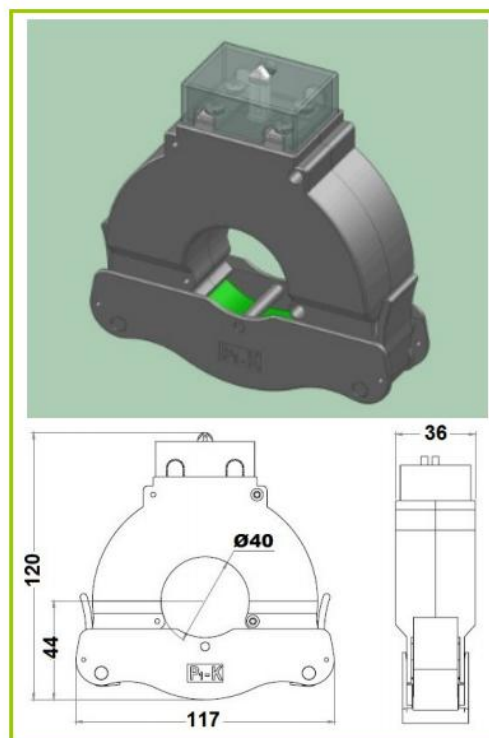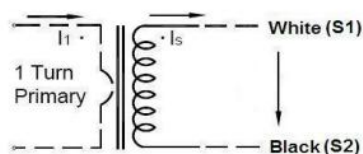

◆ Technique Index

Electrical Parameter	
Frequency	50-400Hz
Rated Input	100A-1000A
Measuring range	5%In-130%In
Rated Output	5A/1A
Ratio	$\leq \pm 0.5\%$
Phase angle	$\leq \pm 30\text{min}$
Dielectric strength	2.5KV/1mA/1min
Insulation Resistance	DC500V/100MΩ min

Mechanical Parameter	
Case	PA /UL94-V0
Bobbin	PA
Core	Silicon steel
Internal structure	Epoxy
Construction	Tie
Operating Temp	$-25^{\circ}\text{C} \sim +75^{\circ}\text{C}$
Operating Humidity	$\leq 85\%$
Output Connection	Terminal

◆ Type Selection (Output: A)

Input/Output (A)	Burden(VA)/Class		
	0.5	1.0	3.0
100/5	1.5	2.5	3.75
150/5	1.5	2.5	3.75
200/5	1.5	2.5	5
250/5	1.5	2.5	5
300/5	2.5	2.5	5
400/5	2.5	3.75	5
500/5	2.5	3.75	5
600/5	2.5	3.75	5
800/5	5	10	15
1000/5	5	10	15

Input/Output (A)	Burden(VA)/Class		
	0.5	1.0	3.0
100/1	1.5	2.5	3.75
150/1	1.5	2.5	3.75
200/1	1.5	2.5	5
250/1	1.5	2.5	5
300/1	1.5	2.5	5
400/1	2.5	3.75	5
500/1	2.5	3.75	5
600/1	2.5	3.75	5
800/1	5	10	15
1000/1	5	10	15