

# Low Voltage Current Transformers

## AMC Series

AMC series current transformer is compact, smaller than other models with the current ratio of the transformer is small, clamshell-style terminal cover is well protected by the second terminal. With related accessories you can use Din rail mounting, a current from 5A to 2500A



### ◆ Features

- Safe, easy to install, portable
- Wide inner window, allowing clamping of big cables or bus-bars
- Wide range of sizes to accommodate all the existing installations

### ◆ Applications

- Current measurement, monitoring and protection for electrical wiring and equipment.
- Current and power measurement for electric motors, lighting, air compressor, heating and ventilation system, air-condition equipment and automation – control system.
- Current, power and energy monitoring device.
- Relay protection device.

### ◆ Circuit connection diagram

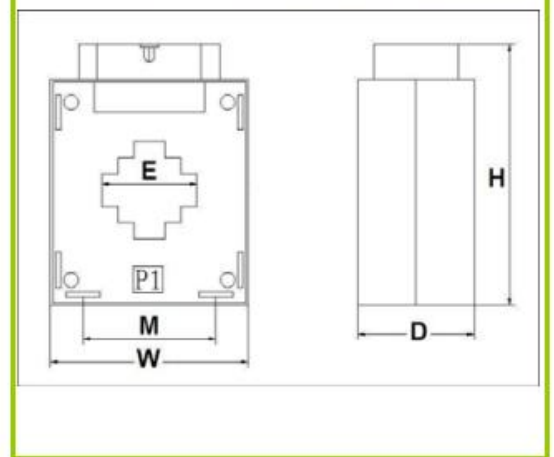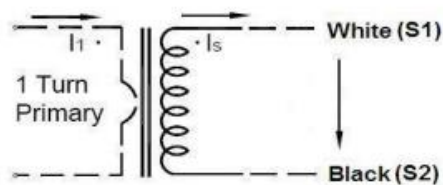

### ◆ Technique Index

Electrical Parameter	
Frequency	50-400Hz
Rated Input	5A-2500A
Measuring range	5%In-130%In
Rated Output	0-5A
Ratio	$\leq \pm 0.2\%$
Phase angle	$\leq \pm 10\text{min}$
Dielectric strength	2.5KV/1mA/1min
Insulation Resistance	DC500V/100MΩ min

Mechanical Parameter	
Case	PC /UL94-V0
Bobbin	PBT
Core	Silicon steel
Internal structure	Epoxy
Construction	Screw
Operating Temp	$-25^{\circ}\text{C} \sim +75^{\circ}\text{C}$
Operating Humidity	$\leq 85\%$
Output Connection	Terminal

### ◆ Type Selection (Output: 1A/5A)

Mfg P/N	Rated Input (A)	Output (A)	Accuracy	Dimensions(mm)				
				E	M	W	H	D
AMC-30	5-400A	1A/5A	0.2, 0.5, 1.0	30	66	84	111	54
AMC-40	5-800A	1A/5A		40	76	84	111	54
AMC-60	5-1500A	1A/5A		60	93	110	147	54
AMC-80	5-2500A	1A/5A		80	136	154	187	54

Xiamen ZT Technology Co., Limited

Skype: zntarjason,

[zntarjason@gmail.com](mailto:zntarjason@gmail.com),

[sales@zntar.com](mailto:sales@zntar.com)

[www.zntar.com](http://www.zntar.com)